

## LUMILUX COMBI EL-F 18 W WT

---

LUMILUX COMBI EL-F T8 | Batten luminaires



### Product benefits

---

- Free-burning lamp for maximum luminous flux
- All the benefits of electronic operation

### Product features

---

- Integrated switch
- For fixed connection, with central, asymmetrical and side cable insertion
- General-purpose batten luminaires



## Technical data

---

### Electrical data

<b>Operating mode</b>	Electronic control gear (ECG)
<b>Nominal wattage</b>	n.rel. W
<b>Lamp wattage</b>	18 W
<b>Mains frequency</b>	50...60 Hz

### Light technical data

<b>Color temperature</b>	2700 K
<b>Luminous flux</b>	1350 lm
<b>Color rendering index Ra</b>	80...89
<b>Luminaire efficiency</b>	0.83

### Dimensions & weight

<b>Length</b>	621.0 mm
<b>Width</b>	30.0 mm
<b>Height</b>	50.0 mm
<b>Mounting hole spacing, length</b>	420.0 mm
<b>Cable penetration</b>	157.0 / 310.0 mm




*Prod.line drw, front, mixed dimensions*

#### Colors & materials

<b>Body material</b>	Aluminum/Plastic
<b>Product color</b>	White

#### Additional product data

<b>Number of lighting outlets</b>	1
<b>Equipment</b>	L 18 W/827
<b>Equipped with lamp</b>	Yes

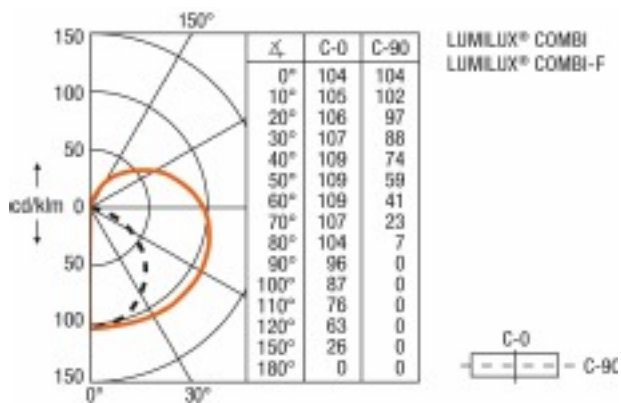

Luminous intensity distribution

### Capabilities

Type of installation	Mounting
Type of connection	Fixed (cutting terminal)
Holder designation	G13

### Certificates & standards

Glow Wire Test according to IEC 695-2-1	960 °C
Luminous efficacy of lamp in luminaire	75 lm/W
EEL of control gear in luminaire	A3
Protection class	insulation class II (safety insulation)
Type of protection	IP20
Protection against ignition and fire	F, MM
Protection class IK (shock resistance)	IK02

**Country specific categorizations**

---

<b>Order reference</b>	72111
------------------------	-------

---

## Equipment / Accessories

---

- Equipped with LUMILUX 827 or available without fluorescent lamp
- With QUICKTRONIC electronic control gear

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.