

LUMILUX COMBI EL-F 30 W WT

LUMILUX COMBI EL-F T8 | Batten luminaires



Product benefits

- Free-burning lamp for maximum luminous flux
- All the benefits of electronic operation

Product features

- Integrated switch
- For fixed connection, with central, asymmetrical and side cable insertion
- General-purpose batten luminaires



Technical data

Electrical data

Operating mode	Electronic control gear (ECG)
Nominal wattage	n.rel. W
Lamp wattage	30 W
Mains frequency	50...60 Hz

Light technical data

Color temperature	2700 K
Luminous flux	2400 lm
Color rendering index Ra	80...89
Luminaire efficiency	0.83

Dimensions & weight

Length	926.0 mm
Width	30.0 mm
Height	50.0 mm
Mounting hole spacing, length	725.0 mm
Cable penetration	157.0 / 304.0 / 450.0 mm




Prod.line drw, front, mixed dimensions

Colors & materials

Body material	Aluminum/Plastic
Product color	White

Additional product data

Number of lighting outlets	1
Equipment	L 30 W/827
Equipped with lamp	Yes

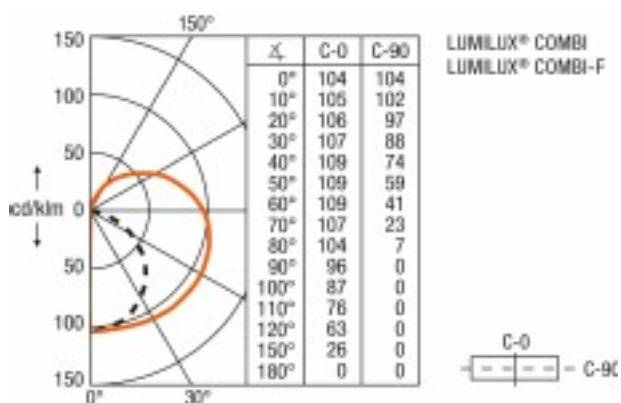

Luminous intensity distribution

Capabilities

Type of installation	Mounting
Type of connection	Fixed (cutting terminal)
Holder designation	G13

Certificates & standards

Glow Wire Test according to IEC 695-2-1	960 °C
Luminous efficacy of lamp in luminaire	80 lm/W
EEL of control gear in luminaire	A3
Protection class	insulation class II (safety insulation)
Type of protection	IP20
Protection against ignition and fire	F, MM
Protection class IK (shock resistance)	IK02

Country specific categorizations

Order reference	72116
------------------------	-------

Equipment / Accessories

- Equipped with LUMILUX 827 or available without fluorescent lamp
- With QUICKTRONIC electronic control gear

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300003597	Folding carton box 1	67 mm x 41 mm x 1070 mm	758.40 g	2.94 dm ³
4050300226347	Shipping carton box 4	127 mm x 95 mm x 1081 mm	3193.00 g	13.04 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.