

DULUX L 36 W/865 2G11

OSRAM DULUX L LUMILUX | CFLni, 1 tube, with 4-pin base for ECG/CCG operation



- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product benefits

- Very economical
- Outstanding luminous flux
- Outstanding luminous efficiency
- Long service life
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG
- Less than half as long as tubular fluorescent lamps
- Improved maintenance

Product features

- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G11 base
- Dimmable (1...100 % with QUICKTRONIC QT_i DALI/DIM)
- Color rendering index R_a : 80...89
- Average life: 20,000 h (with QUICKTRONIC)
- Operates on battery, solar and AC power with suitable Electronic Control Gear
- Also available in blue



Technical data

Electrical data


Nominal wattage	36 W
Rated lamp efficacy (standard condition)	77 lm/W
Rated wattage	36 W

Light technical data


Color rendering index Ra	80...89
Rated luminous flux	2750 lm
Luminous flux at 25 °C	2750 lm
Light color	865
Color temperature	6500 K
Nominal luminous flux	2750 lm
Rated LLMF at 2,000 h	0.84
Rated LLMF at 4,000 h	0.81
Rated LLMF at 6,000 h	0.79
Rated LLMF at 8,000 h	0.77
Rated LLMF at 12,000 h	0.76
Rated LLMF at 16,000 h	0.73
Rated LLMF at 20,000 h	0.72
Luminance	2.8 cd/cm ²

Dimensions & weight

Length	411.0 mm
--------	----------

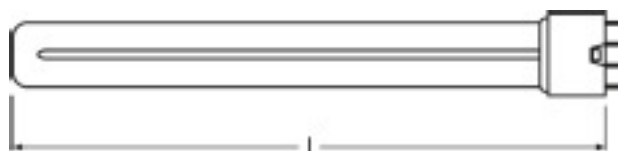

Product line drawing with letters

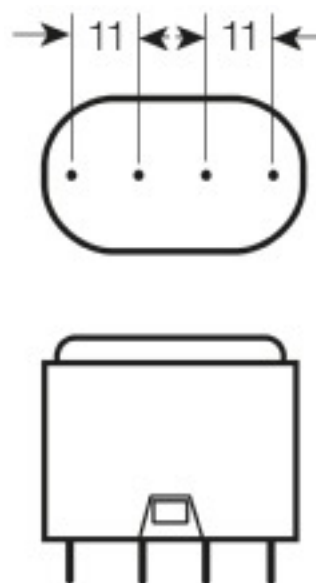

Base

Colors & materials

Lamp mercury content	1.7 mg
----------------------	--------

Temperatures

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

Lifespan

Service life	13000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50


Lifespan

Operation mode LLMF/LSF	HF
Lifespan	20000 h ¹⁾

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	2G11
Appropriate disposal acc. to WEEE	Yes

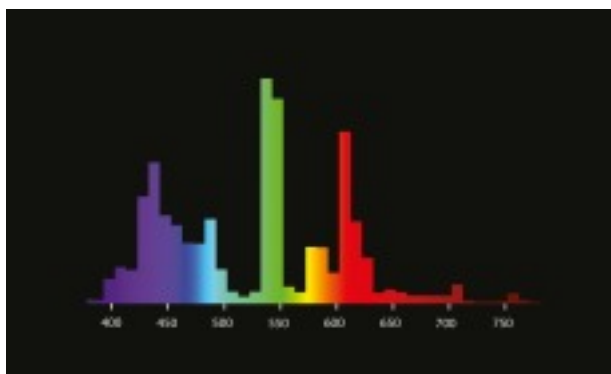


Spectral power distribution

Capabilities

Suitable for indoor	Yes
---------------------	-----

Equipment / Accessories


- Suitable for standard control gears and starters
- Suitable for operation on electronic and conventional control gear

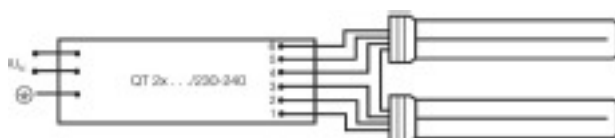

Circuit diagram



Circuit diagram

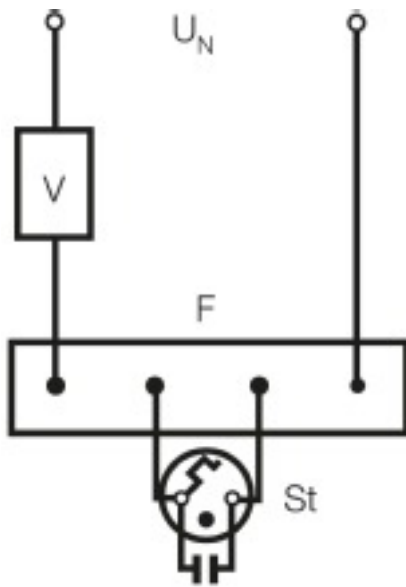

Circuit diagram

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300328263	Folding carton box 1	46 mm x 26 mm x 442 mm	124.13 g	0.53 dm ³
4050300139364	Shipping carton box 10	136 mm x 103 mm x 455 mm	1357.50 g	6.37 dm ³

References / Links

For more information on QUICKTRONIC electronic control gear go to

- ▶ www.osram.com/QUICKTRONIC

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.