

FC 40 W/827 2GX13

LUMILUX T5 FC | Circular fluorescent lamps 16 mm



- Public buildings
- Offices
- Restaurants
- Industry
- Shops
- Supermarkets and department stores
- Hotels

Product benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Excellent uniform illumination with no shadows
- Good average life (with OSRAM ECG)

Product features

- Good color rendering group: 1B (R_a : 80...89)
- Dimmable (from 100...1 % with QT_i DALI/DIM ECG)
- Single-ended round fluorescent lamp
- Tube diameter: 16.0 mm



Technical data

Electrical data


Nominal wattage	40 W
Rated lamp efficacy (standard condition)	85 lm/W
Rated wattage	39.9 W

Light technical data


Color rendering index Ra	80...89
Rated luminous flux	3400 lm
Light color	827
Color temperature	2700 K
Nominal luminous flux	3400 lm
Light color as per EN 12464-1	LUMILUX INTERNA
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.83
Rated LLMF at 6,000 h	0.82
Rated LLMF at 8,000 h	0.80
Rated LLMF at 12,000 h	0.75

Dimensions & weight


Tube diameter	16 mm
Length	305.0 mm
Length with base excl. base pins/connection	300.00 mm
Diameter	16.0 mm

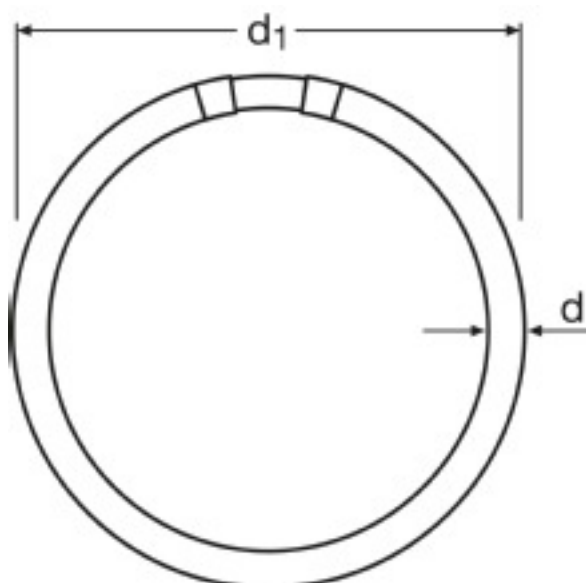


Product line drawing with letters

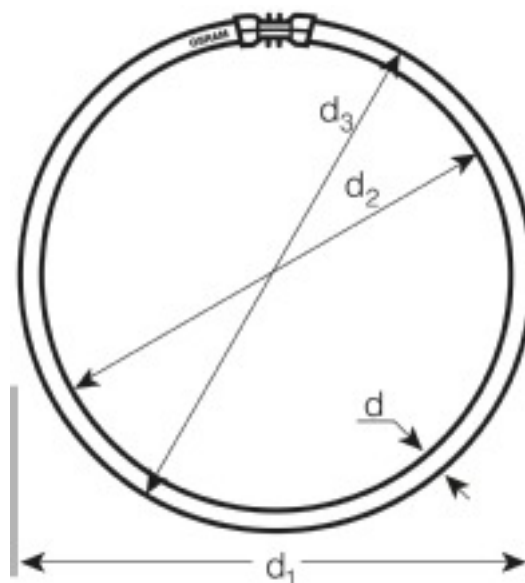

Product line drawing - technical

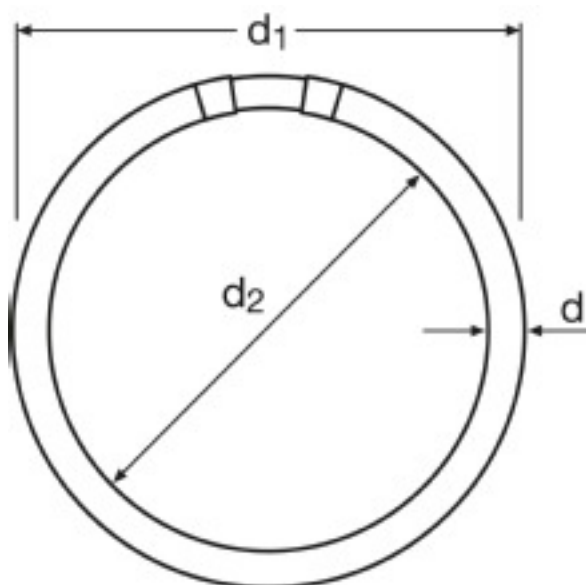

Product line drawing - technical

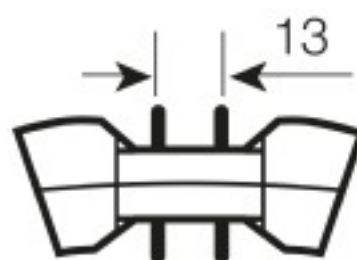

Base

Colors & materials

Lamp mercury content	3.7 mg
----------------------	--------

Temperatures

Rated ambient temp.w.max.luminous flux	30.0 °C
--	---------


Lifespan

Service life	8000 h ¹⁾
Lifespan	12000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.98
Rated lamp survival factor at 8,000 h	0.92
Rated lamp survival factor at 12,000 h	0.50
Operation mode LLMF/LSF	HF

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	2GX13
Appropriate disposal acc. to WEEE	Yes
Footnote used only for product	Suitable for ECG operation only

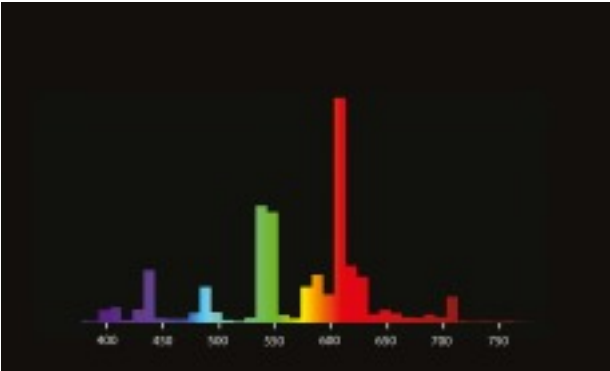

Spectral power distribution

Capabilities

Suitable for indoor	Yes
---------------------	-----

Certificates & standards

EEI – Energy Label	A
--------------------	---

System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs

Equipment / Accessories

- Exclusively for operation on electronic control gears

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

▶ www.osram.com/system-guarantee

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.