



product details

QTIS e 1x58/220-240

Product description: QTIS e 1x58/220-240
Product code: 4050300663845
Quantity: Shipping carton box (VS) contains
20 Piece (PCE)

You can find this product in the eCatalog:

http://catalog.myosram.com?~language=EN&~country=DE&it_p=4050300663845

Applications	
Suitable f. fixtures with prot. class	Class I
Dimmable	No

Certificates & Standards	
Approval marks - approval	VDE
EEL - Energy Label	A3
Standards	acc. to EN 61347-2-3 acc. to EN 55015:2006 + A1:2007 acc. to EN 61000-3-2 acc. to EN 61547
Type of protection	IP20

General Description	
Design / version	ECG standard

Logistical Data	
Product weight	278.110 g
Relative humidity	5...85 % ¹⁾
Temperature range at storage	-40...85 °C

Technical - Electrical Data	
Inrush current	28 A
Nominal voltage	220-240 V
Mains frequency	50-60 Hz
DC voltage	198...264 V ²⁾
Operating frequency	45...50 kHz
Max. no. of ECGs on circuit breaker 10 A	8
Max. no. of ECGs on circuit breaker 16 A	13
TH full width at half maximum	230 µs

Technical - Geometries	
Length	360.00 mm
Width	30.00 mm
Nominal voltage	30.00 mm
Mounting hole spacing, length	350 mm

Technical - Temperatures	
Ambient temperature range	-15...+50 °C
Operating temperature	70 °C
Max. housing temperature in case of fault	110 °C

Packaging units				
Product code	Packaging type and content	Dimensions in h x w x l	Gross weight	Volume
4050300940625	Unpacked contains 1 Piece	31,000 mm x 29,000 mm x 358,000 mm	299,000 g (0,000 g)	0,333 Cubic dec.





Packaging units				
Product code	Packaging type and content	Dimensions in h x w x l	Gross weight	Volume
4050300663845	Shipping carton box contains 20 Piece	167,000 mm x 130,000 mm x 391,000 mm	5.808,200 g (0,000 g)	8,489 Cubic dec.

General


- Supply voltage: 220 - 240 V
- Line frequency: 50 - 60 Hz
- Line voltage: 198 - 254 V
- Not suitable for DC operation
- Instant start within 0.3 s
- Automatic safety shutdown of lamps in the event of a defect or at end of life
- Automatic restart of replacement lamps
- Energy Efficiency Index EEI=A3
- Approval marks: EMV Sign
- Safety: to EN 61347-2-3
- RI suppression: to EN 55015:2006+A1:2007/CISPR 15
- Line harmonics: to EN 61000-3-2
- Immunity: to EN 61547

1) Maximum 56 days/year at 85 %

2) Without approbation



Lamp wiring

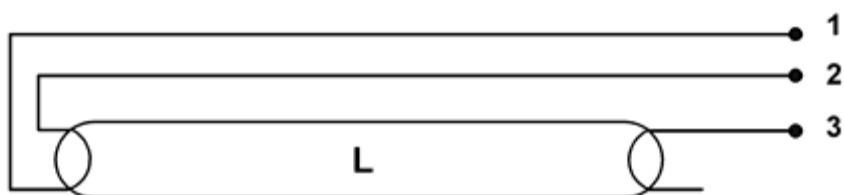

Max. permissible cable length between ECG and lamp: < 2.0 m (PIN 1; 2); < 1.0 m (PIN 3)