




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

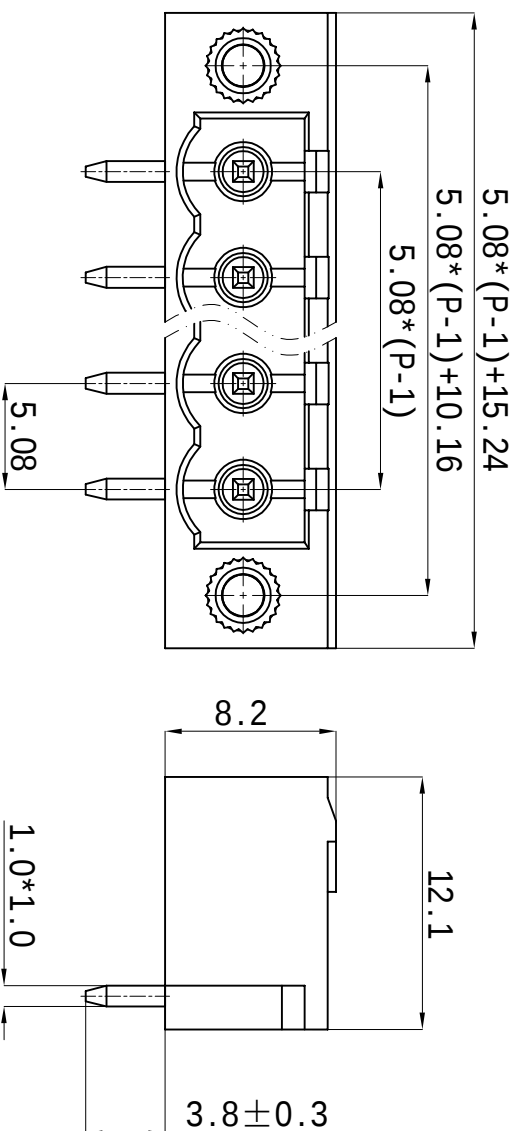

P为通道数, P=Poles

订货信息 Order Info

订货号 PART NUMBER	通道数 NO. OF POS	颜色 COLOR
MC-PA5.08Hxx-F	2-20	绿色/Green

未注公差表参照GB/T14486

0-3	>3-6	>6-10	>10-14	>14-18
± 0.08	± 0.09	± 0.10	± 0.12	± 0.14
>18-24	>24-30	>30-40	>40-50	>50-65
± 0.16	± 0.18	± 0.21	± 0.24	± 0.28
>65-80	>80-100	>100-120	>120-140	>140-160
± 0.36	± 0.41	± 0.46	± 0.51	± 0.56
				± 0.62
				角度
				$\pm 2^{\circ}$

	Rev. 01	Name
单位/Unit	mm	MC-PA5.08Hxx-F 系列2-20通道针型插座 MC-PA5.08Hxx-F Series 2-20 male terminal block with solder pin

IEC 额定数据/IEC Rated data		
过电压类别/Surge voltage category	III	II
污染等级/Pollution degree	3	2
额定电压/Rated voltage	250V	320V 400V
额定脉冲耐受电压/Rated surge voltage	4kV	4kV 4kV
额定电流/Rated current	12A	12A 12A
UL 额定数据/UL Rated data	B	C D
额定电流/Rated current	15A	- 15A
额定电压/Rated voltage	300V	- 300V
其他信息/Other information		
塑件/Housing	PA66	
触点材料/Contact	铜合金/Copper alloy	
镀层/Coating	镀锡/Tin-plated	
螺钉类型/Screw thread	M2.5	
扭矩/Tightening torque	0.3-0.4N·m	
阻燃等级/Flame retardant rating	UL94-V0	
使用环境温度/Usage ambient temperature	-25℃ - +70℃	
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃	
认证/Approval		