




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

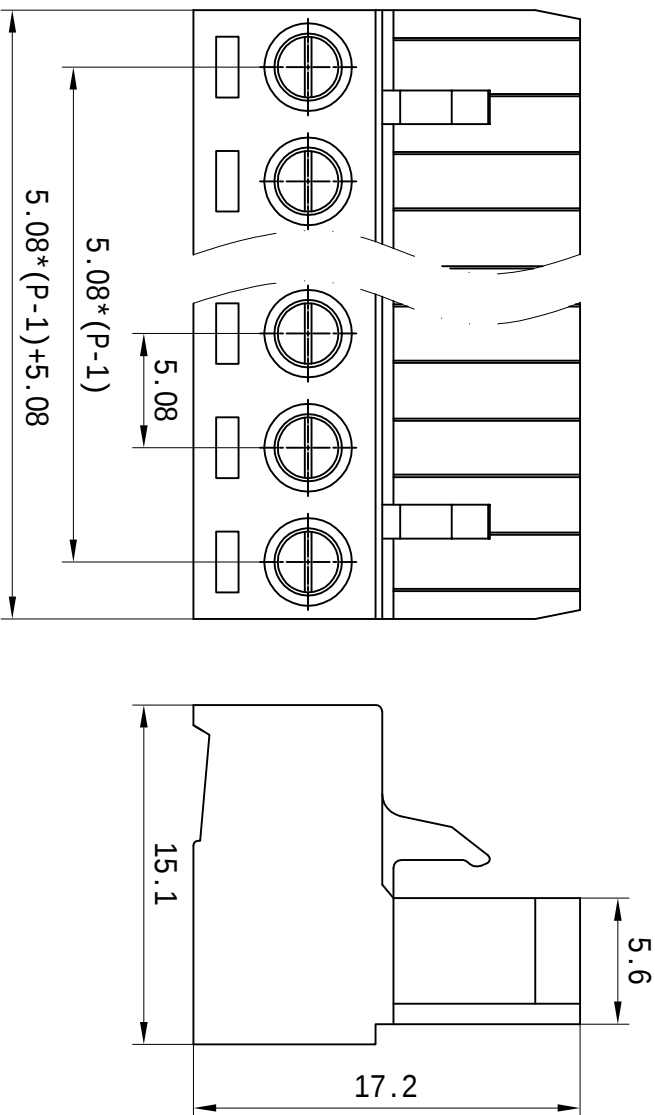

P为通道数, P=Poles

订货信息 Order Info

订货号 PART NUMBER	通道数 NO. OF POS	颜色 COLOR
MC-RB5.08HXXC	2-20	绿色/Green

尺寸公差表参照GB/T14486

0-3	>3-6	>6-10	>10-14	>14-18
±0.08	±0.09	±0.10	±0.12	±0.14
>18-24	>24-30	>30-40	>40-50	>50-65
±0.16	±0.18	±0.21	±0.24	±0.28
>65-80	>80-100	>100-120	>120-140	>140-160
±0.32	±0.36	±0.41	±0.46	±0.51
>160-180	>180-200	±0.56	±0.62	±0.68
±0.72	±0.78	±0.84	±0.90	±0.96

IEC 额定数据/IEC Rated data			
接线范围/Wire range	0.2-2.5mm ²		
单股导线/Solid	0.2-2.5mm ²		
软导线/Stranded	0.2-2.5mm ²		
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-2.5mm ²		
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-2.5mm ²		
剥线长度/Strip length	7-8mm		
过电压等级/Overvoltage level	III	III	II
污染等级/Pollution level	3	2	2
额定电压/Rated voltage	250V	320V	630V
额定脉冲耐受电压/Rated surge voltage	4kV	4kV	4kV
额定电流/Rated current	12A	12A	12A
UL 额定数据/UL Rated data	B	C	D
额定电流/Rated current	15A	-	15A
额定电压/Rated voltage	300V	-	300V
接线范围/Wire range	AWG30-12		
其他信息/Other information			
塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper Alloy		
镀层/Coating	镀锡/Tin-plated		
螺钉类型/Screw thread	M3		
扭矩/Tightening torque	0.5-0.6N·m		
阻燃等级/Flame retardant rating	UL94-V0		
使用环境温度/Usage ambient temperature	-25℃ - +70℃		
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃		
认证/Approval	cUL [®] us		

	Rev. 01	Name
单位 Unit mm		MC-RB5.08HXXC 系列2-20位通道孔型连接器
		MC-RB5.08HXXC Female Connector