


MIRAGE



ПКТ
ПКТ

BS-9663-2x10 T8 LED

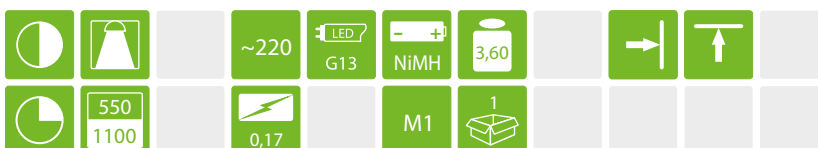

BS-1660-1x10 T8 LED



BS-1660-2x10 T8 LED

рабочий диапазон температур -30°C...+35°C



BS-9663-2x18 T8



BS-9663-2x18 EP



BS-7661-1x18 T8



BS-1660-1x18 T8				220			1,40				
		1050 1050				M1					
BS-1660-2x18 T8				≈220			2,10				
		1500 1500				M1					
BS-1660-1x18 EP				220			1,40				
		1050 1050				M1					
BS-1660-2x18 EP				≈220			2,00				
		1500 1500				M1					
BS-9663-2x18 T8 DALI				~220			2,80	DALI			
		70 1500				M1					
BS-1660-1x18 T8 DALI				220			1,40	DALI			
		1050 1050				M1					
BS-1660-2x18 T8 DALI				≈220			2,00	DALI			
		1500 1500				M1					
BS-9663-2x18 T8 Z-BUS				~220			2,90	Z BUS			
		300 1500				M1					
BS-1660-1x18 T8 Z-BUS				220			1,40	Z BUS			
		1050 1050				M1					
BS-1660-2x18 T8 Z-BUS				220			2,00	Z BUS			
		1500 1500				M1					
BS-9661-2x20 T8 LED				~220			4,80				
		1150 2300				M1					


BS-7661-1x20 T8 LED				~220			2,80				
		1200 1200				M1	1				
				0,20							
BS-7661-2x20 T8 LED				~220			6,40				
		2300 2300				M1	1				
				0,34							
BS-1660-1x20 T8 LED				220			2,00				
		1200 1200				M1	1				
				0,13							
BS-1660-2x20 T8 LED рабочий диапазон температур -30°C...+35°C				≈220			3,20				
		2300 2300				M1	1				
				0,26							
BS-7663-1x35 T5				~220			2,60				
		177 3550				M1	1				
				0,34							
BS-7661-1x35 T5				~220			2,60				
		177 3550				M1	1				
				0,34							
BS-1660-1x35 T5				220			2,10				
		3550 3550				M1	1				
				0,26							
BS-1660-2x35 T5				220			3,10				
		5000 5000				M1	1				
				0,40							
BS-9663-2x35 T5 DALI				220			3,80	DALI			
		5000 5000				M1	1				
				0,40							
BS-1660-1x35 T5 DALI				220			2,10	DALI			
		3550 3550				M1	1				
				0,26							
BS-1660-2x35 T5 DALI				220			3,20	DALI			
		5000 5000				M1	1				
				0,40							

BS-9663-2x35 T5 Z-BUS				~220	G13	NiCd	3,80	Z-BUS			
		524 5250		0,40		M1					
BS-1660-1x35 T5 Z-BUS				220	G13		2,10	Z-BUS			
		3550 3550		0,26		M1					
BS-1660-2x35 T5 Z-BUS				220	G13		3,20	Z-BUS			
		5000 5000		0,40		M1					
BS-9663-2x36 T8				~220	G13	NiCd	3,80				
		116 3310		0,42		M1					
BS-9663-2x36 EP				~220	G13	NiCd	3,80				
		210 4600		0,42		M1					
BS-9661-2x36 T8***				~220	G13	NiCd	3,60				
		116 3310		0,42		M1					
*** - Лампа ЛЛ Т8											
BS-9661-2x36 EP				~220	G13	NiCd	3,50				
рабочий диапазон температур -20°C...+35°C		210 4600		0,42		M1					
BS-7663-1x36 T8				~220	G13	NiCd	2,10				
		260 2600		0,24		M1					
BS-7661-1x36 T8				~220	G13	NiCd	2,10				
		260 2600		0,24		M1					
BS-1660-1x36 T8				220	G13		2,10				
		2600 2600		0,16		M1					
BS-1660-1x36 EP				220	G13		2,10				
		2520 2520		0,16		M1					

BS-1660-2x36 T8											
						M1					
BS-1660-2x36 EP											
						M1					
BS-9663-2x36 T8 DALI								DALI			
						M1					
BS-1660-1x36 T8 DALI								DALI			
						M1					
BS-1660-2x36 T8 DALI								DALI			
						M1					
BS-9663-2x36 T8 Z-BUS								Z-BUS			
						M1					
BS-1660-1x36 T8 Z-BUS								Z-BUS			
						M1					
BS-1660-1x36 T8 Z-BUS								Z-BUS			
						M1					
BS-7663-1x49 T5											
						M1					
BS-7661-1x49 T5											
						M1					
BS-1660-1x49 T5											
						M1					

BS-7661-2x49 T5									
BS-9663-2x49 T5 DALI									
BS-1660-1x49 T5 DALI									
BS-1660-2x49 T5 DALI									
BS-9663-2x49 T5 Z-BUS									
BS-1660-1x49 T5 DALI									

Габаритные размеры

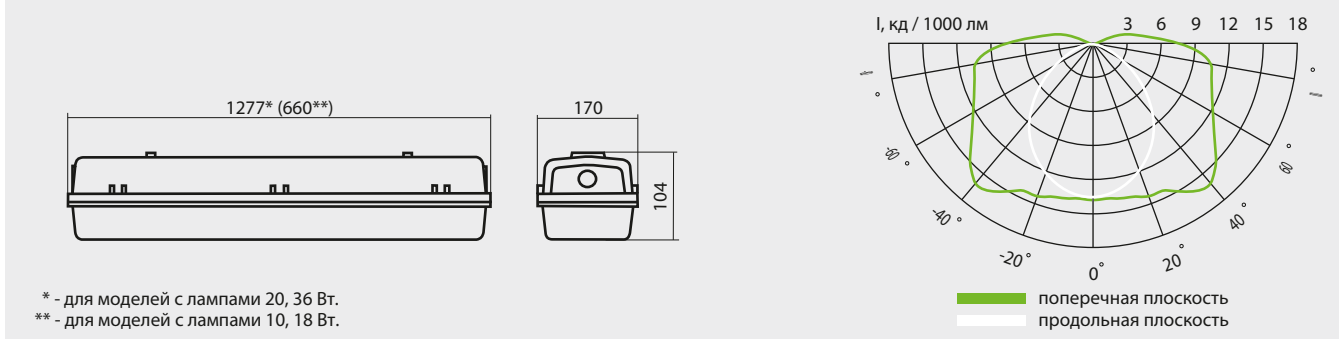

Пример для заказа:

Аварийный светильник BS-9663-2x10 T8 LED - 10 шт.