

TIARUS / ТИАРУС



IP20



УХЛ4



ПКТ
НСТ

BS-7791-0-450/3000-840 LED



450
3000

~220



0,18



NiCd

3,29



BS-7793-0-450/3000-840 LED



450
3000

~220



0,19



NiCd

3,83



BS-1790-0-0/3000-840 LED



3000
3000

220



0,18



M1

2,86



BS-1790-0-0/3000-840 DALI LED



3000
3000

220



0,18



M1

2,90



BS-7791-0-450/3000-840 DALI LED



450
3000

~220



0,18



NiCd

3,33



BS-7793-0-450/3000-840 DALI LED



450
3000

~220



0,19




NiCd

3,87



BS-7791-0-450/3000-840 Z-BUS LED											
BS-7793-0-450/3000-840 Z-BUS LED											

Габаритные размеры

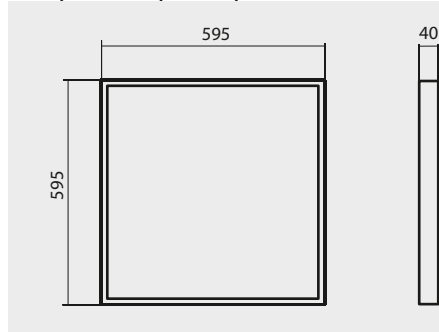

Светотехнические характеристики



Пример для заказа:

Аварийный светильник BS-7791 Z-BUS LED - 10шт.