

T5 BATTEN ECO

Batten luminaires for T5/Ø16mm HE fluorescent lamps



Product Description

- Class I, F Mark, IP 20
- Strong mechanical structure by Aluminium Extrusion Profile
- **Pre-heat start and EOLL protection**
- Trunking System for connection up to 10 Battens
- Color Box Packaging


Applications

- Offices and schools
- Shops and supermarkets
- Cove lighting



A) Technical Data

Note: Lamps are not included

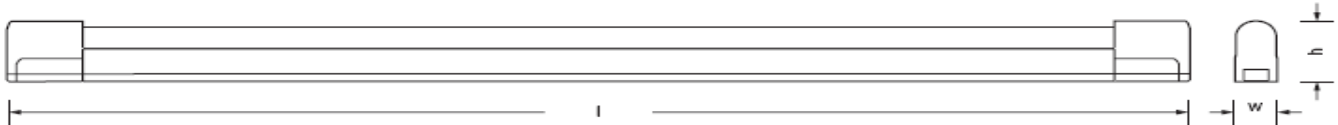

Reference	T5 BATTEN ECO 14W	T5 BATTEN ECO 21W	T5 BATTEN ECO 28W
For Lamp (Not Included)	T5 HE 14W	T5 HE 21W	T5 HE 28W
Lamp Base	G5		
Protection Class (Insulation)	Class I		
Protection Class (Ignition/Fire)	F mark		
Ingress Protection	IP 20		
Color	White		
Material	Aluminum Extrusion Profile		
Dimension (L x W x H) [mm]	588 x 25 x 44.5	888 x 25 x 44.5	1188 x 25 x 44.5
Rated Voltage	220-240V~, 50/60Hz		
Power Factor	0.6	0.6	0.98
Safety	IEC 60598		
Approval marks	CCC		
Standard Pack.	25 x 1		
Packaging Languages	ENGLISH		


T5 BATTEN ECO

Batten luminaires for T5/Ø16mm HE fluorescent lamps

B) Ordering information


Product Reference	EAN 10/ Single Unit	EAN 40/ Package Unit (25 PCS)
T5 BATTEN ECO 14W UNP	4008321190130	4008321190147
T5 BATTEN ECO 21W UNP	4008321190079	4008321190086
T5 BATTEN ECO 28W UNP	4008321190055	4008321190062

C) Packaging

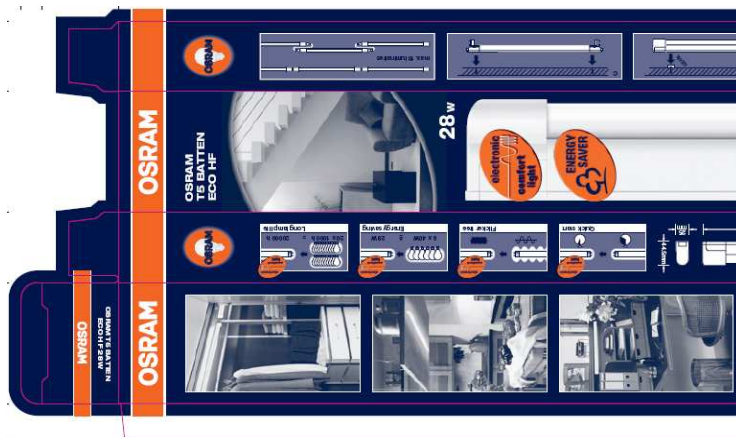


D) Accessories (Included)


Connecting cables

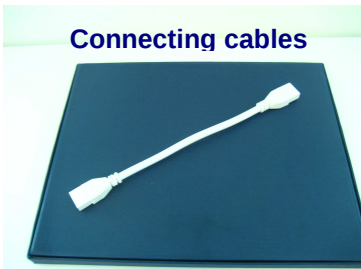

Installation kit



Coupler



Connect up to 10 Luminaires for strip and cove lighting applications.